

# Hoisting

- Y470301
- Y470302
- Y470201
- Y470208
- Y470202
- Y470209
- Y470203
- Y470210
- Y470310
- Y470311
- Y470315
- Y470316
- Y470401
- Y470402
- Y470405
- Y470406
- Y470407

## Lever hoists

- Rugged steel body construction • Light weight, compact and portable • Short 360 ° rotation handle and low handle effort • Easy free chain pull • Impact resistant • Latch-type swivel hooks
- Equipped with German standard chains • CE approved

Model	Cap.	Length Chain/m	Diam Chain/mm	N.W.
Y470301	0,75 t	1,5	6	6,8
Y470302	1,5 t	1,5	8	12

## Chain Hoists

- Steel forming cases • Double cover protection • Brake mechanism • Double ratchet pawls • Load chain guide and stripper • Powder metal bushing • Lower and upper hook • Equipped with German standard chains • Meets or exceeds all industrial standards including EN13157:2003 AND ASME/ANSI B30.22 requirements • Conforms to machinery directive 98/37/EC • CE approved

Model	Cap.	Length Chain/m	Diam Chain/mm	N.W.
Y470201	0,5 t	3	6x18	9
Y470208	0,5 t	6	6x18	13,2
Y470202	1 t	3	6x18	11
Y470209	1 t	6	6x18	15,2
Y470203	2 t	3	6x18	15
Y470210	2 t	6	6x18	19,2

## Cable puller

- Light weight, compact, high strength aluminium housing • Overload protection by a sharing pin in the forward lever • Spare shear pins are conveniently located in the carrying handle or operating lever • Easy, smooth installation of the wire rope • Long rope advance per each lever stroke • Large opening in the top of the unit for cleaning • Manufactured according to machinery directive 98/37/EC • The standard wire rope length is 20 metres • CE approved

Model	Cap.	Length Cable/m	Diam Cable/mm	N.W. with-out cable
Y470310	0,8 t	20	8,4	7
Y470311	1,6 t	20	11,5	14

## Cable

Model	Cap.	Length Cable/m	Diam Cable/mm	N.W. with-out cable
Y470315	0,8 t	30	8,4	11
Y470316	1,6 t	30	11,5	16

## Beam Clamp


- Flexible application due to wide adjustment range • Central threaded spindle for easy attachment and a safe and secure grip • The spindle secures against loosening • CE approved

Model	Cap.	Flange Width/mm	N.W.
Y470401	1 t	75-230	4
Y470402	2 t	75-230	5

## Plain Trolley

- Rugged steel side plate formed to include bumpers and trolley guards • Frames connected by the steel equalizer load crossbar secured by locking nuts and cotter pins • Universal tread flanged track wheels equipped with shielded ball bearings • Hardened wheels and axles for added strength and durability • Spacer washers can be shifted inside or outside for easy adjustment to wide range of beams • Manufactured according to pr EN 13157:2003, machinery directive 98/37/EC • CE approved

Model	Cap.	Flange Width/mm	N.W.
Y470405	0,5 t	64-300	7
Y470406	1 t	64-300	14
Y470407	2 t	88-300	22

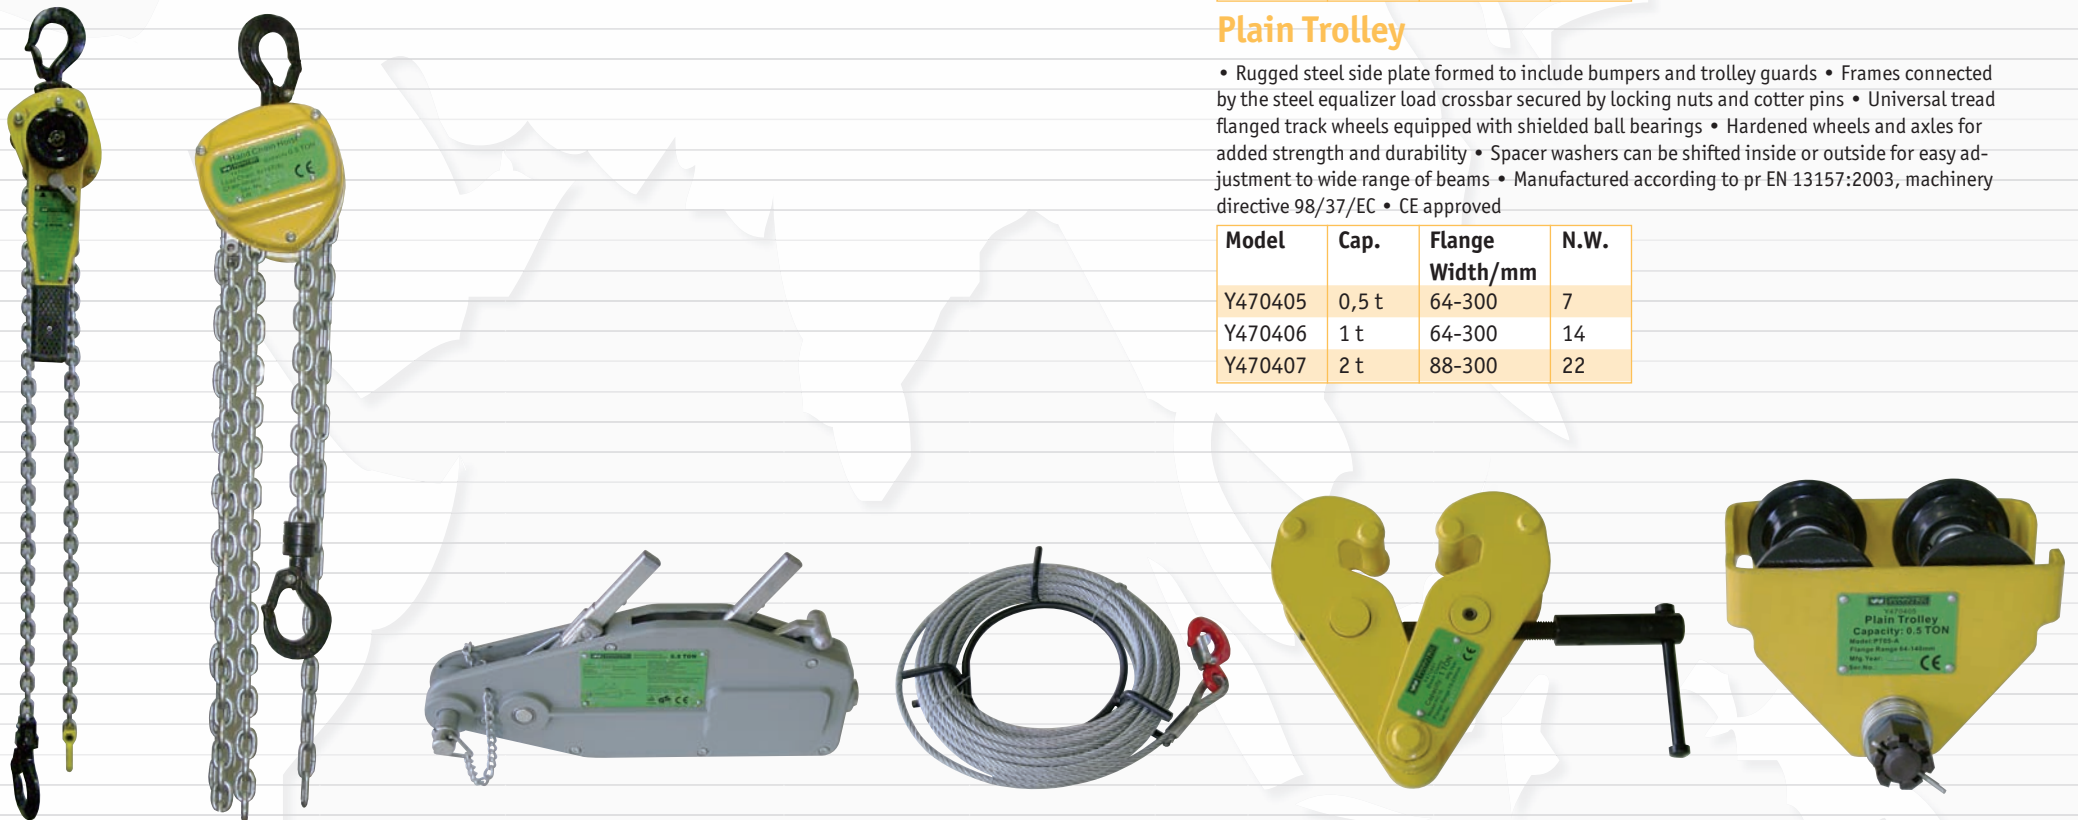


# Pneumatic Jack

Y432025

## Telescopic Air Jack

25/10 Tons. This lightweight compact telescopic jack comes with a handle that folds down. First stage 238mm & 25 Tons. Second stage 230mm & 10 Tons. 2 PC extended handle. 3 Adaptors included. Low entrance height of just 166mm. Dead man's control. Ideal for road service (trucks).

Model	Cap.	Min h.	Max h.	Length	Width	G.W.	N.W.
Y432025	25/10 t	166	320	470	270	30	29

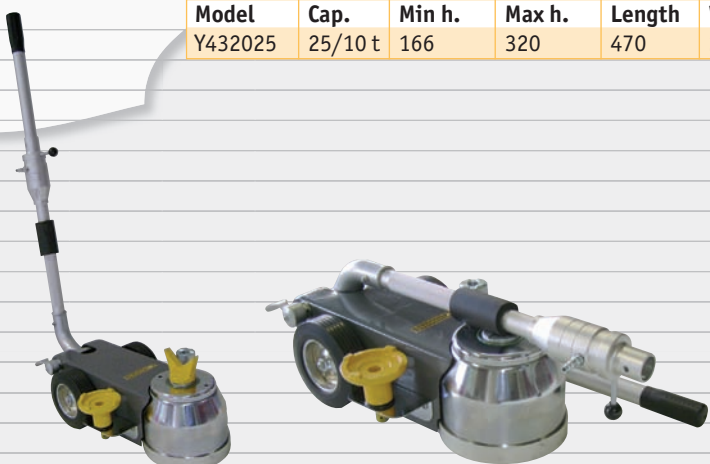

# Support

Y451205

## Jack Stand with Wheels

12 Tons. Sturdy, welded steel construction for superior safety and strength. Nylon wheels and removable handle ensure quick and SAFE positioning of jackstand under vehicle. Handle holder for vertical storage of handle while jackstand is not in use. Delivered per pair.

Model	Cap.	Min h.	Max h.	Length	Width	G.W.	N.W.
Y451205	12 t	300	460	220	220	21	20

